




TECHNICAL DATA SHEET

STEPLITE EASYCLEAN S4 GREEN/BLACK

General information

Size range	
• EU	36 - 48
• UK	3.5 - 13
• US	4 - 15
The testresults in this technical datasheet are performed on size EU 42, UK 8, US 9.	
Weight / pair	
• Safety level: Steel toe cap	± 58.55 oz
Colors	
	
green - black	

Upper


A. Dimensions	
• Height	outer measure: 15.0 in
	cutting edge: 12.2 in
• Foot length	outer measure: 11.8 in
	inner measure: 11.0 in
B. Thickness	
• Upper edge	0.11 - 0.13 in
• Calf	0.11 - 0.12 in
• Shinbone	0.11 - 0.11 in
• Ankle	0.14 - 0.15 in
• Heel	0.15 - 0.21 in
C. Raw material	
	NEOTANE (proprietary polyurethane compound)

D. Density		
	86.8 - 93.5 oz/gallon	
E. Tensile strength		
(incl. lining)	1450 ± 290 psi	
F. Elongation		
(incl. lining)	600 +/- 100%	
G. Hardness		
	43 +/- 2 Sh A	
H. Tear strength		
(incl. lining) lbf/in	57.1 ± 11.4 lb/in	
I. Aging		
(incl. lining)	7 days at 158 °F	14 days at 158 °F
• Tensile strength	1682.4 psi	1305.3 psi
• Elongation	580 ± 20%	600 ± 20%
• Tear strength	65.1 lb/in	51.4 lb/in
J. Chemical resistance		
	see detailed list	
K. Environmental temperature		
• Maximum	± 212 °F	
• Minimum	Cold insulation down to -4 °F	

Lining

A. Material	
	PU coating on polyester fabric
B. Seams	
	Knitted seams

Outsole profile

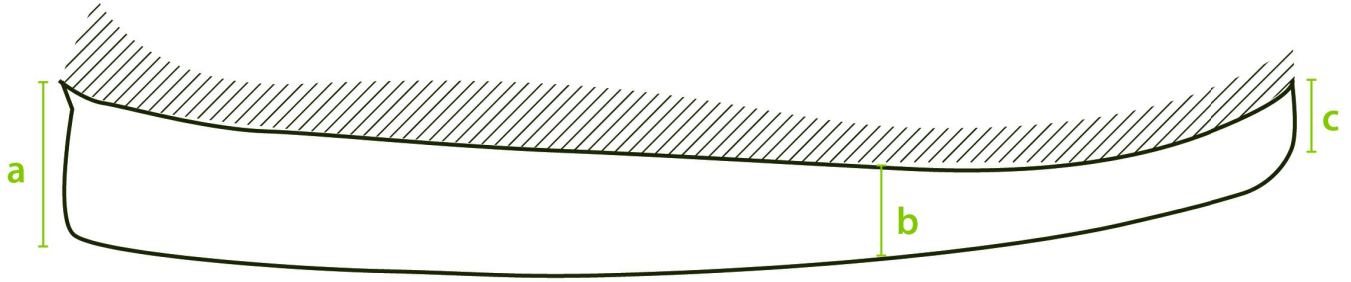

A. Dimensions

• Heel

• Thickness	(a)	1.3 in
• Profile depth		0.00 in
• Length		0.00 in
• Width		3.1 in

• Outsole

• Thickness	(b)	0.67 in
	(c)	0.63 in
		0.00 in
• Profile depth		0.00 in

B. Raw material

NEOTANE (proprietary polyurethane compound)

C. Density

6.5 - 7.0 ppg (imp.)

D. Mechanical characteristics

See upper (E)-(F)-(H)

E. Energy absorption of the seat region

20-25 J (requirement ≥ 20 J)

F. Antistatic

dry: $1 \times 10^8 - 1 \times 10^9$ Ohm

wet: $1 \times 10^7 - 1 \times 10^9$ Ohm

G. Abrasion resistance

0.0031 in³

H. Hardness

60 +/- 10 Sh A

I. Footwear slip resistance

SRA


J. Chemical resistance

[see detailed list](#)

Safety


	Standard	Required	Type	Result
Toe cap				
Impact resistance (200J)	EN ISO 20345:2011	> 0.55 in	Metallic	0.75 in
Compression resistance	EN ISO 20345:2011	> 0.55 in	Metallic	0.75 in
Width of toe cap	outer measure: 1.7 in			
Height of toe cap	outer measure: 3.4 in			
Toe cap	Steel			

Certificates

	EN ISO 20345:2011 2203886-02-86
--	------------------------------------

Accessories

Insole	
Three layers	
• Toplayer	woven textile
• Color	green
• Thickness	0.03 in
• Interlayer	needle felt
• Color	cyan blue
• Thickness	0.12 in
• Bottom	gel latex
• Color	black
• Thickness	0.04 in



Washable at 86 °F