




TECHNICAL DATA SHEET

StepliteX SolidGrip O4 green/black

General information

Size range	
• EU	36 - 49
• UK	3.5 - 15
• US	4 - 16
The testresults in this technical datasheet are performed on size EU 42, UK 8, US 9	
Weight / pair	
• Safety level: Non-safety	± 1 510 g
Colours	
	
green - black	

Upper


A. Dimensions	
• Height	outer measure: 36.0 - 39.0 cm
	cutting edge: 26.5 - 29.0 cm
• Foot length	outer measure: 30.0 cm
	inner measure: 28.0 cm
B. Thickness	
• Upper edge	2.6 - 3.1 mm
• Calf	2.8 - 3.4 mm
• Shinbone	2.8 - 3.6 mm
• Ankle	4.2 - 5.3 mm
• Heel	5.6 - 6.0 mm
C. Raw material	
	NEOTANE (proprietary polyurethane compound)
D. Density	
	0.65 - 0.70 g/ml

E. Tensile strength		
(incl. lining)	10 ± 2 N/mm ²	
F. Elongation		
(incl. lining)	600 +/- 100%	
G. Hardness		
	43 +/- 2 Sh A	
H. Tear strength		
(incl. lining) N/mm	10.0 ± 2.0 N/mm	
I. Aging		
(incl. lining)	7 days at 70 °C	14 days at 70 °C
• Tensile strength	11.6 Mpa	9.0 Mpa
• Elongation	580 ± 20%	600 ± 20%
• Tear strength	11.4 N/mm	9.0 N/mm
J. Chemical resistance		
	see detailed list	
K. Environmental temperature		
• Maximum	± 100 °C	
• Minimum	Cold insulation down to -30 °C	

Lining

A. Material	
	PU coating on polyester fabric
B. Seams	
	Welded and knitted seams

Outsole profile

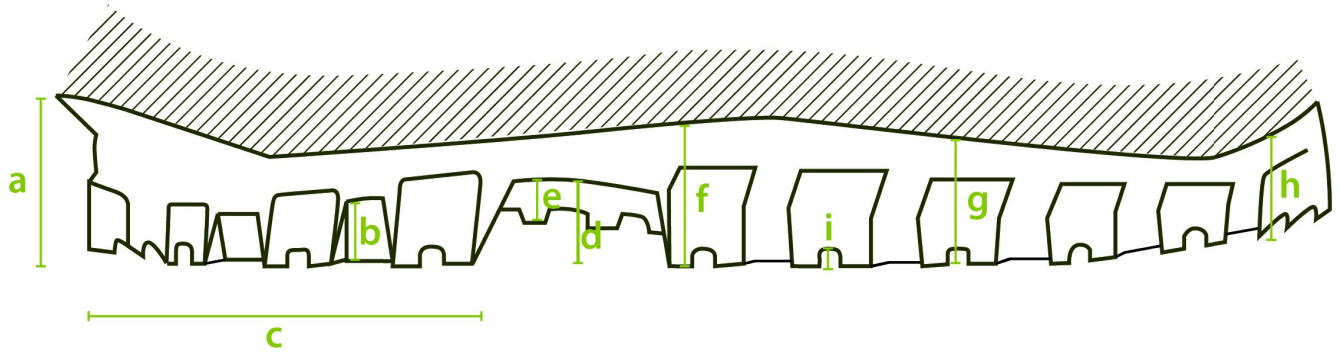

A. Dimensions

• Heel		
• Thickness	(a)	40.5 mm
• Profile depth	(b)	14.6 mm
• Length	(c)	102.8 mm
• Width		85.8 mm
• Middle foot		
• Height	(d)	16.4 mm
• Ladder anti-slip grips	(e)	4.3 mm
• Outsole		
• Thickness	(f)	33.8 mm
	(g)	30.5 mm
	(h)	22.0 mm
• Profile depth	(i)	9.0 mm

B. Raw material

NEOTANE (proprietary polyurethane compound)

C. Density

0.65 - 0.70 g/ml

D. Mechanical characteristics

See upper (E)-(F)-(H)

E. Energy absorption of the seat region

30-40 J (requirement ≥ 20 J)

F. Antistatic

dry: 1×10^8 - 1×10^9 Ohm

wet: 1×10^7 - 1×10^9 Ohm

G. Abrasion resistance

50 mm³

H. Hardness

60 +/- 10 Sh A

I. Footwear slip resistance	
	SR
J. Chemical resistance	
	see detailed list

Certificates

	EN ISO 20344:2022+A1:2024 EN ISO 20347:2022+A1:2024 2410091-02-86
UK CA	EN ISO 20347:2012 AB0321/19217-01/E00-00

Accessories

Thermo-moulded footbed		
Two layers		
• Toplayer	woven textile	
• Colour	black	
• Thickness	0.70 mm	
• Bottom	PU foam	
• Colour	black	
• Thickness	3.0 - 7.0 mm	
Washable at 30°C		